



REV	DATE	CONTENT
00	20210729	NEW

1	VG
2	NC
3	NC
4	XV0
5	V0
6	VSS
7	VDD
8	SDA
9	CLK
10	A0
11	RST
12	CS0

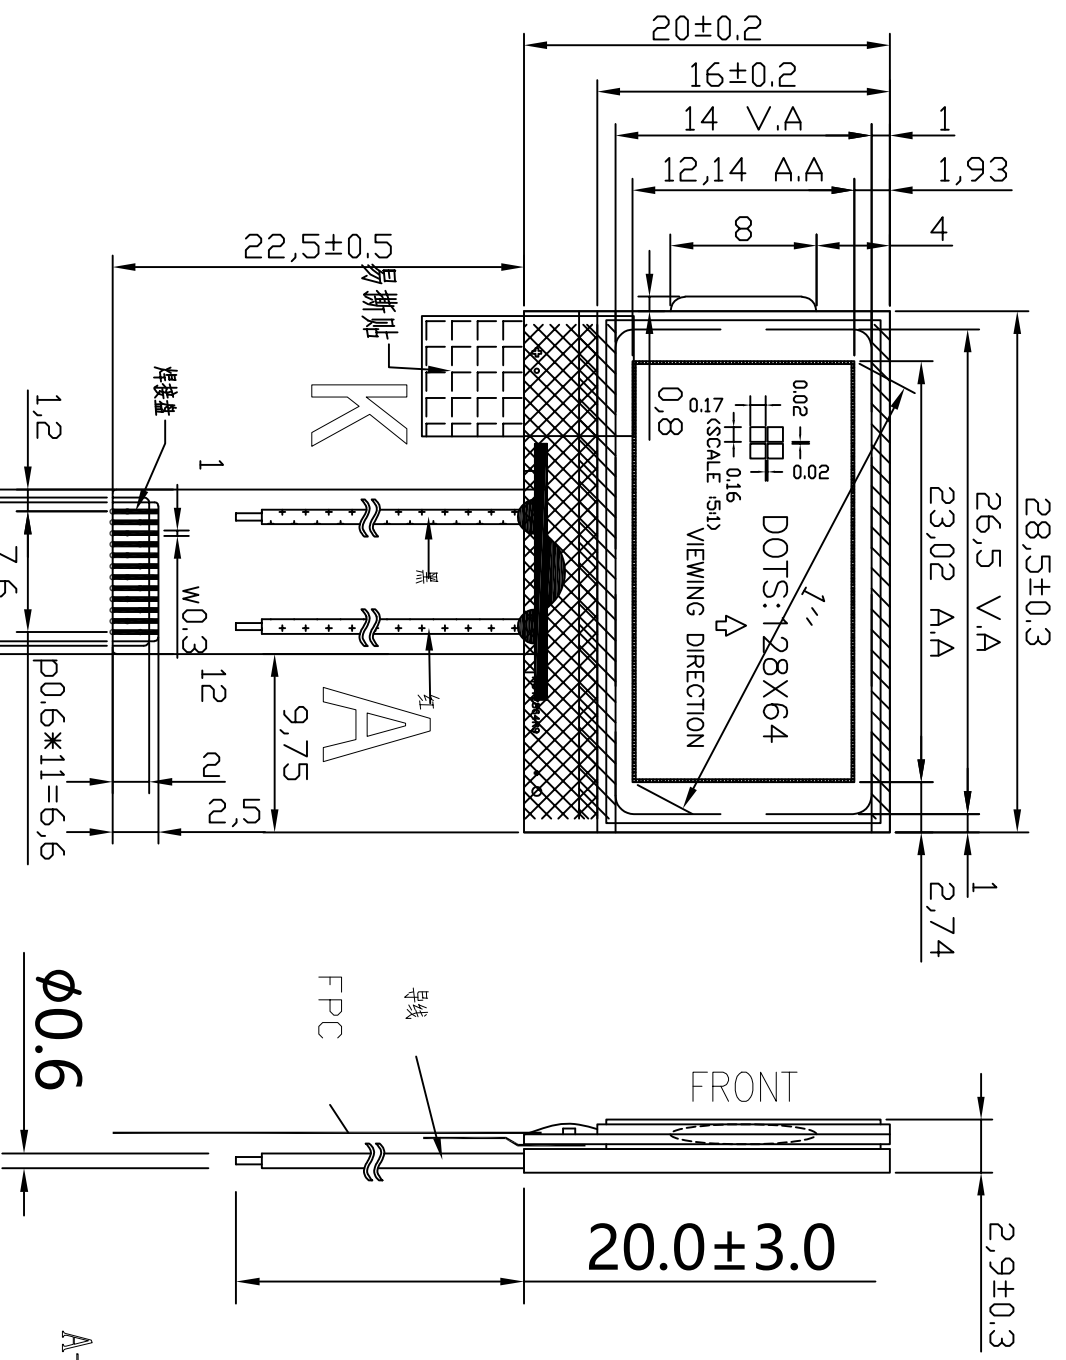

电路图CIRCUIT DIAGRAM
(LED SMD 1 X 1 = 1 dies)



A-K=3.0±0.2V, IF=15mA, White

The non-specified tolerance of dimension is±0.2mm.

SPECIFICATIONS

- | | |
|---------------------|-------------------------|
| DISPLAY MODE : | DFSTN,NEGATIVE MODE |
| DRIVE CONDITION : | 1/65 DUTY 1/9 BIAS |
| VIEWING DIRECTION : | 6 O'CLOCK |
| OPERATING TEMP : | -20°C TO +70°C |
| STORAGE TEMP : | -30°C TO +80°C |
| OPERATING VOLTAGE: | vop=8.5 V, vdd=3.3V |
| FRAME FREQUENCY: | 64 Hz(TYPE) |
| FRONT POLARIZER : | TRANSMISSIVE,ADHESIVE |
| BACK POLARIZER : | TRANSMISSIVE,ADHESIVE |
| CUSTOMER NO.: | |
| CONNECTORS : | COG/FPC(IC:7567 OR EQU) |
- 有害物质管理: 符合 RoHS要求

SCALE:	1/1	UNIT:	mm
REV:	V0	PAGE:	1/1
DRAW	XH	MODEL	
CHECK		LCM DRAWING	
APPROVE		TITLE	
		LCM DRAWING	
		DWG NO. H012864R9-WDH010-01	