
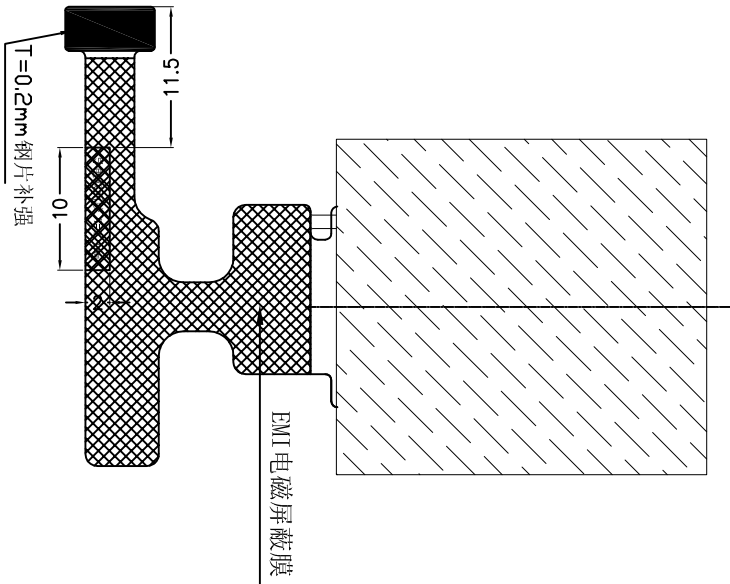


ROSH

Revision	Dispersion	Date	Signed
01	First	2022.06.02	YP

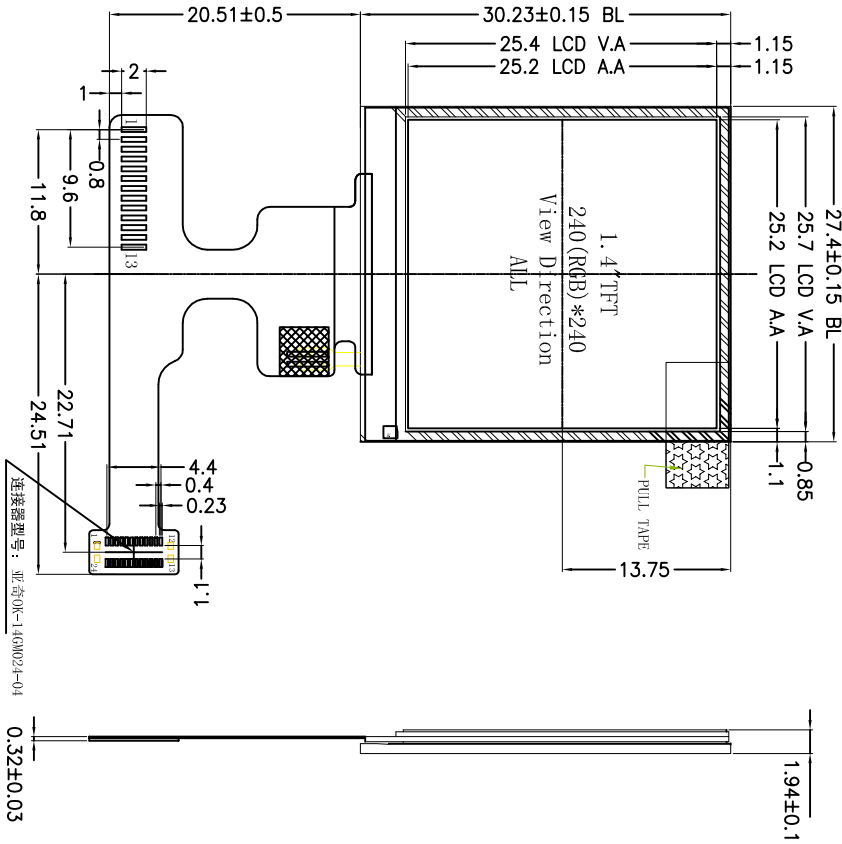


PIN	ASSIGNMENT
1	VCC (2.8V)
2	VDDIO (1.8V)
3	LEDA
4	LEDK
5	GND
6	S5
7	S6
8	S7
9	S8
10	S9
11	S10
12	S11
13	S4
14	S3
15	S2
16	S1
17	S0
18	GND
19	LSCE
20	LSCK
21	LSDA
22	LSAO
23	LSRST
24	LPTF

FPC展开出货

ASPI-1L

- NOTES:
1. DISPLAY TYPE: 1.4" TFT, TRANSMISSIVE
 2. DRIVER IC: ST7789V2
 3. VIEWING DIRECTION: ALL
 4. BACKLIGHT: 3 pcs White LED
 5. INPUT CURRENT: VCC 2.8V (type)
 6. OPERATING TEMP: -20° C ~ +70° C
 7. STORAGE TEMP: -30° C ~ +80° C
 8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
 9. ROHS COMPLIABLY

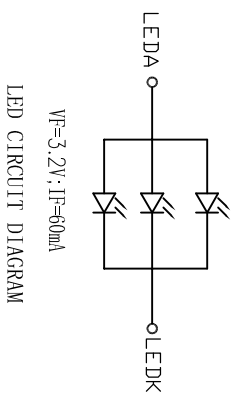

深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	HZ140SPBS01-A0
Part No.	Approve	Material	Unmarked
Drawing No.	Checked	LCM	Tolerance ±0.2
	Draw	Date	Unit mm
		2022.06.02	Scale --
		Rev 00	Page 1 of 1

8 7 6 5 4 3 2 1