


ROSH

Revision	Description	Date	Signed
A0	首次发行	24.07.04	Pengliz



正视图

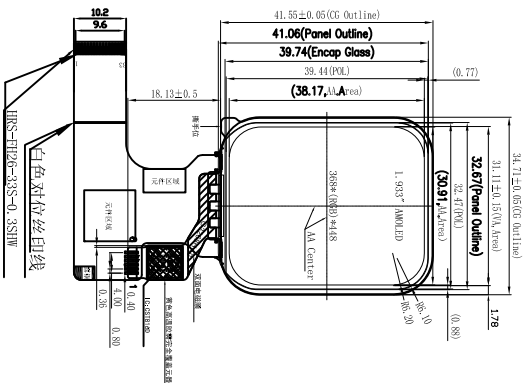

侧视图



背视图

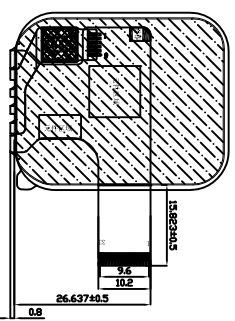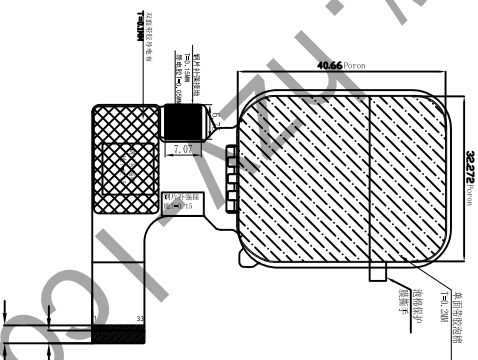

弯折示意图  
弯折固定出货

1	tp-vcc
2	tp-scl
3	tp-sda
4	tp-int
5	tp-reset
6	GND

NO.	SYMBOL	Pin Assignment
1	TP-VCC	1
2	TP-SCL	2
3	TP-SDA	3
4	TP-INT	4
5	TP-RESET	5
6	GND	6
7	NC	7
8	NC	8
9	NC	9
10	NC	10
11	NC	11
12	NC	12
13	NC	13
14	NC	14
15	GND	15
16	NC	16
17	TE	17
18	RESET	18
19	CS	19
20	DCX	20
21	D3	21
22	D2	22
23	SDI	23
24	SDO	24
25	SCL	25
26	GND	26
27	VCI	27
28	IOWCC	28
29	MTP	29
30	GND	30
31	VRAT	31
32	VCI-IN	32
33	GND	33

IIC电压:3.3V

- NOTE:
1. DISPLAY TYPE: 1.933" AMOLED, LTFS; TP TYPE: 0SS
  2. DRIVER IC: CH13601; Touch IC: CST1816D; Power IC: BV6802;
  3. VIEWING DIRECTION: FREE
  4. OPERATING TEMPERATURE: -20° C~+70° C.
  5. STORAGE TEMPERATURE: -30° C~+80° C.
  6. Brightness 600 Type: X: 0.30±0.03, Y: 0.315±0.03.
  7. (. . .) REFERENCE DIMENSION
  8. "⊗" ICON MEAN CRITICAL DIM
  9. MUST MEET THE REQUIREMENT OF ROHS

- 盖板要求:
1. Lens 材质, 0.7mm超薄子
  2. 表面处理: 无
  3. CS ≥ 4500pa, 10L ≥ 9um, 表面硬度 ≥ 7H, 表面弯曲度 ≤ 0.2mm;
  4. 成员可视区透光率 ≥ 85%, 油墨区不透光;
  5. 64克钢球30CM, 中心点3次;
  6. 印刷油墨为绝缘油墨, 黑色区域油墨厚度 ≤ 15um, 绝缘电阻大于100MΩ



深圳市华之洋光电科技有限公司  
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title
---	---	AMOLED-1.933
Part No.	Approve	Material
---	Checked	LCM
Drawing No.	Draw	Date
---	Draw	2024.07.04

Customer Ref.	Model No.	Drawing Title
---	---	AMOLED-1.933
Part No.	Approve	Material
---	Checked	LCM
Drawing No.	Draw	Date
---	Draw	2024.07.04

Umarketed Tolerance	Unit	Scale	Page
±0.2	mm	--	1 of 1

