
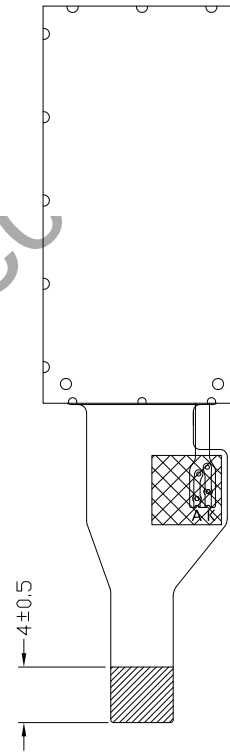
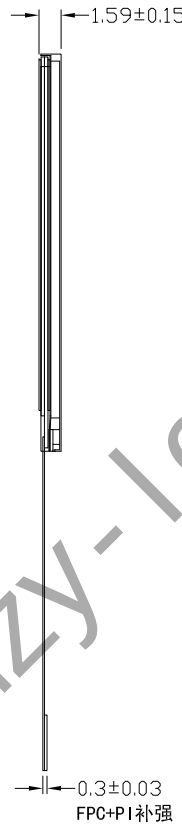


ROSH

Reversion	Discription	Date	Signed
V0	First	2025.11.10	Penglz

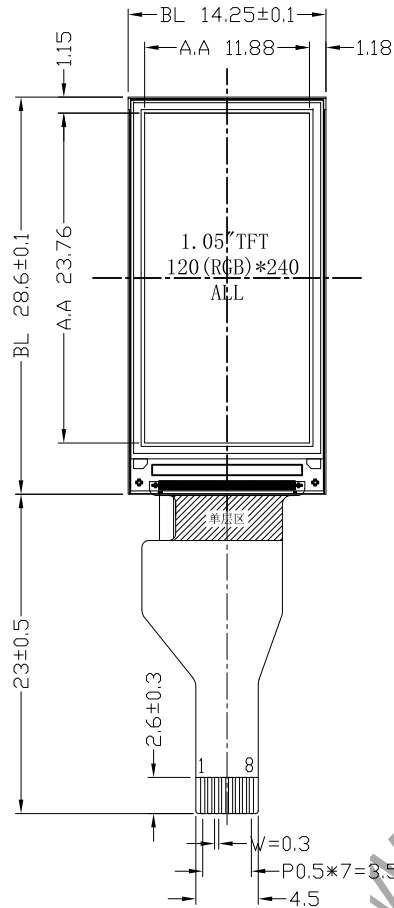


PIN	SYMBOL
1	LEDA
2	GND
3	RESET
4	RS
5	SDA
6	SCL
7	VDD
8	CS

4线SPI

NOTES:

1. DISPLAY TYPE:1.05" TFT, TRANSMISSIVE
2. DRIVER IC:GC9A01 or COMPATIBLE
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 1 pcs White LED
5. BRIGHTNESS: 500 cd/m2 (TYP)
6. INPUT CURRENT: VCC 2.8V (TYP)
7. OPERATING TEMP: -20° C~ +70° C
8. STORAGE TEMP: -30° C~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY
11. 建议机壳开窗可视区比LCD A. A区单边大 0.3mm



 深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD							
Customer Ref.	Model No.		Drawing Title	HZ0105QVPHGWS01N-AA			
---	Approve		Material	Unmarked Tolerance	Unit	Scale	Page
---	Checked		LCM	±0.3	mm	--	1 of 1
Drawing No.	Draw	Penglz	Date	2025.11.10	Rev V0		
