
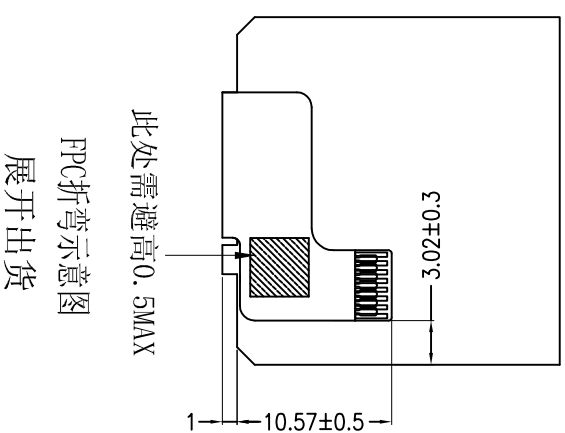
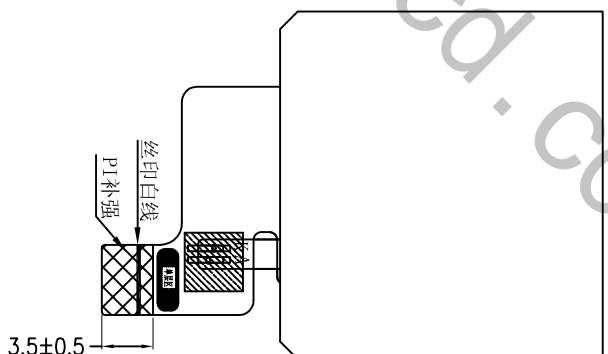


ROSH

|          |              |            |        |
|----------|--------------|------------|--------|
| Revision | Dispcription | Date       | Signed |
| 01       | First        | 2023.04.06 | YP     |

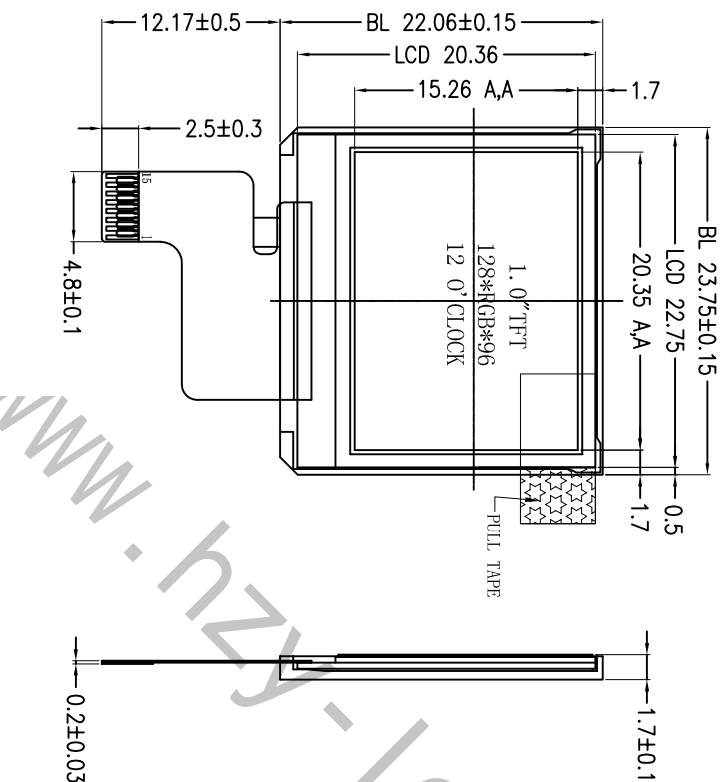


| No. | Symbol |
|-----|--------|
| 1   | LED-   |
| 2   | GND    |
| 3   | LPTE   |
| 4   | LSDA   |
| 5   | LSAO   |
| 6   | LSCK   |
| 7   | LSCE-B |
| 8   | LSRSTB |
| 9   | VI018  |
| 10  | VI028  |
| 11  | VI028  |
| 12  | GND    |
| 13  | GND    |
| 14  | LED+   |
| 15  | LED+   |

4SPI

NOTES:

1. DISPLAY TYPE: 1.0" TFT, TRANSMISSIVE
2. DRIVER IC: ST7735S
3. VIEWING DIRECTION: 12.0" clock;
4. BACKLIGHT: 1 pcs White LED
5. INPUT CURRENT: VCC 2.8V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. RoHS COMPLIABLY

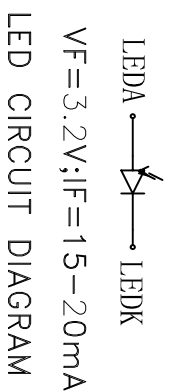

深圳市华之洋光电科技有限公司  
Shenzhen HZY Photoelectric Technology Co., Ltd

|               |           |               |                |
|---------------|-----------|---------------|----------------|
| Customer Ref. | Model No. | Drawing Title | HZ010BTBS02-A0 |
| Part No.      | Approve   | Material      | Unmarked       |
| Drawing No.   | Checked   | LCM           | ±0.2           |
|               | Draw      | Date          | 2023.04.06     |
|               |           | Rev           | 00             |