

ROSH

8

7

6

5

4

3

2

1

Revision

Discription

Date



Signed

V0

First issue

25. 04. 11

Penglz

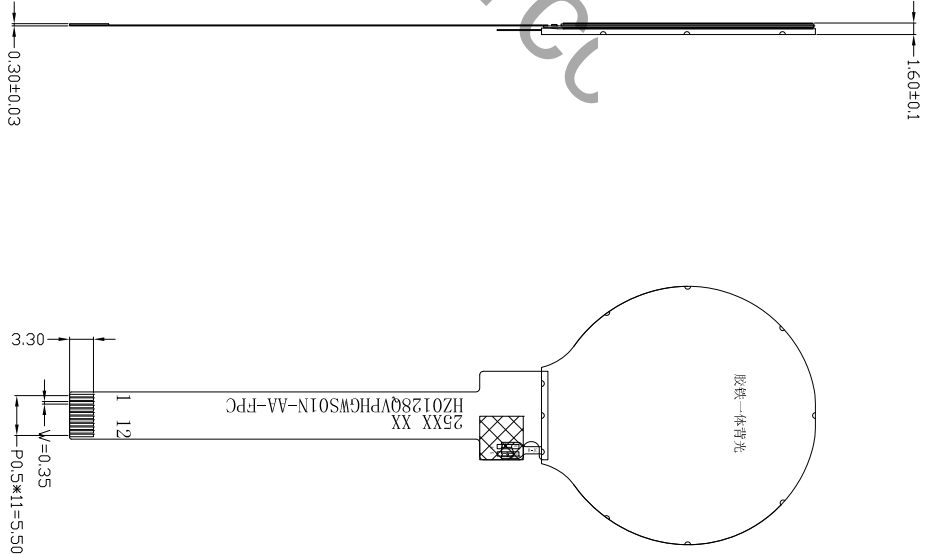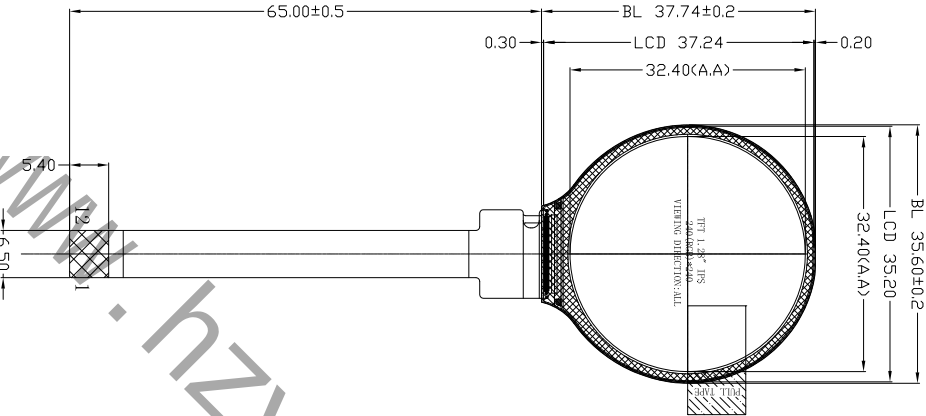


PIN	DESCRIPTION
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND
6	GND
7	D/C
8	CS
9	SCL
10	SDA
11	RESET
12	GND

4-SPI

NOTES:

1. DISPLAY TYPE:1.28" TFT, TRANSMISSIVE Normally Black
2. DRIVER IC:GC9A01 or compatible
3. VIEWING DIRECTION: All
4. BACKLIGHT: 2 pcs White LED
5. BRIGHTNESS: 350cd/m² (typ)
6. INPUT VOLTAGE: VCC 2.8V (typ)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. RoHS COMPLIABLY



深圳市华之洋光电科技有限公司
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.		Drawing Title		H20128QVPHGWS01N-AA	
Part No.	Model No.	Approve	Material	Unmarked Tolerance	Unit
---	---	Checked	LCM	±0.2	mm
Drawing No.	Draw	Penglz	Date	2025. 04. 11	Rev 00

