
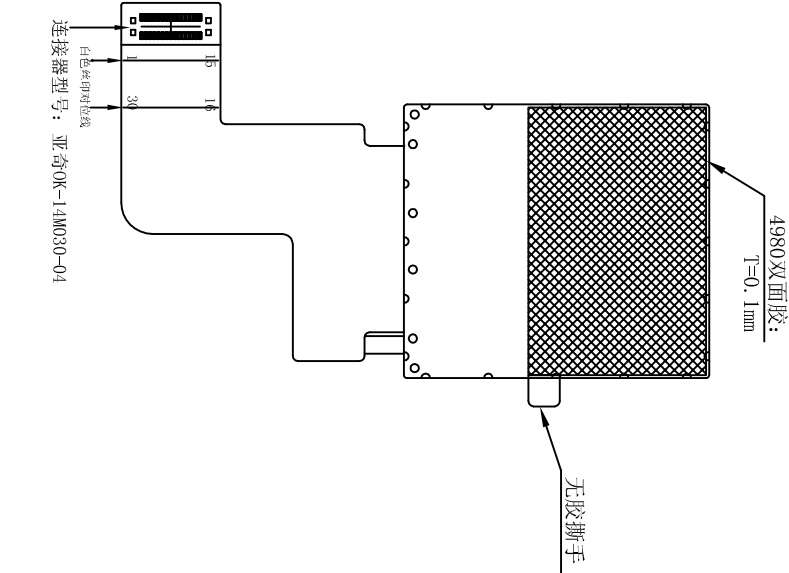



ROSH

Revision	Discription	Date	Signed
01	First	2022.08.23	YP

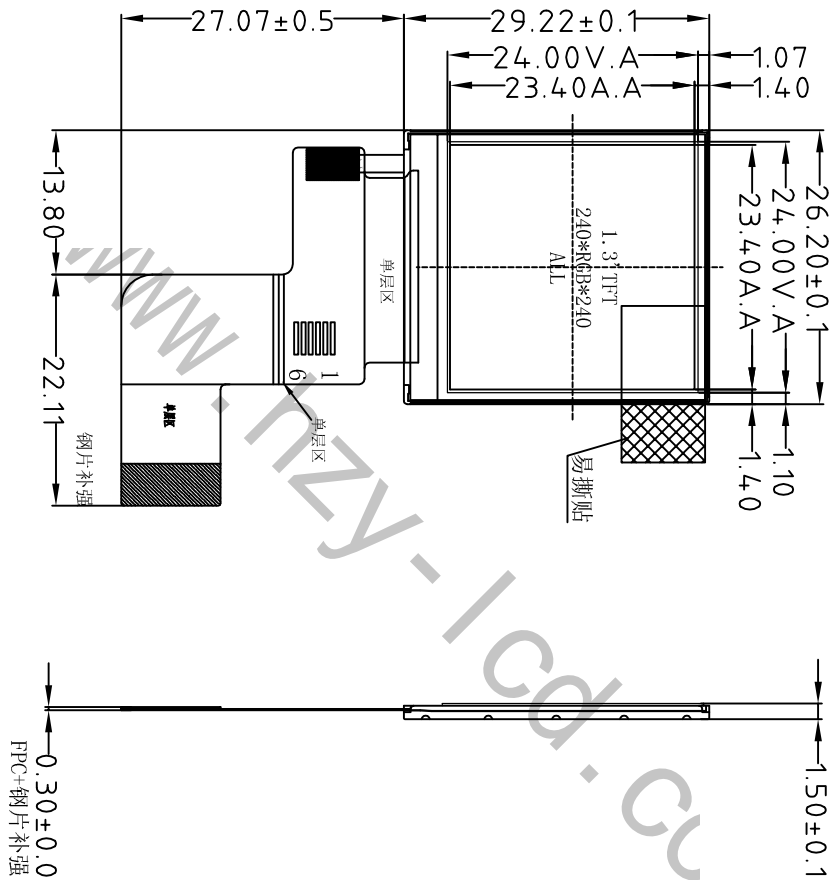

PIN	NAME	22	23	24	25	26	27	28	29	30
1	GND	SDA_TP	SCL_TP	INT_TP	GND	RST	RST_TP	VCC_TP(3.0V)		
2	SDA									
3	SCL									
4	RST									
5	INT									
6	VDD									

- NOTES:
1. DISPLAY TYPE: 1.3" TFT, TRANSMISSIVE
 2. DRIVER IC: ST7789V2
 3. VIEWING DIRECTION: ALL O'CLOCK
 4. BACKLIGHT: 2 pcs White LED
 5. INPUT CURRENT: VCC 2.8V (type)
 6. OPERATING TEMP: -20° C ~ +70° C
 7. STORAGE TEMP: -30° C ~ +80° C
 8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
 9. ROHS COMPLIABLY

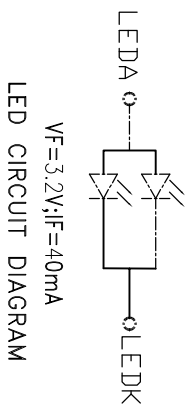

深圳市华之洋光电科技有限公司

Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	HZ013SPBS01-A0	
Part No.	Approve	Material	Unmarked Tolerance	Unit
Drawing No.	Checked	LCM	±0.2	mm
	Draw	Date	2022.08.23	Rev 00
	YP			