

ROSH

8

7

6

5

4

3

2

1

Reversion

Discription

Date

Signed

V0

First issue

25.07.15

Penglz

D

D

C

C



B

B

A

A

ROSH

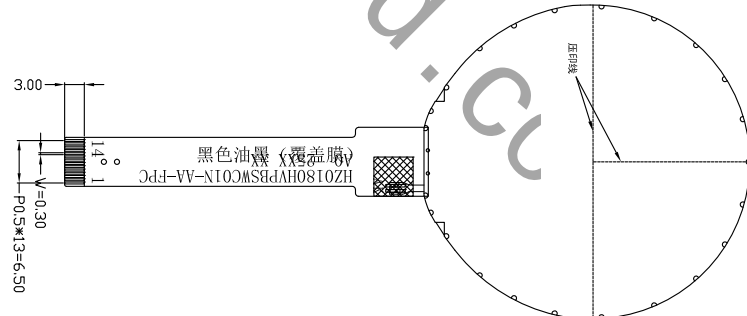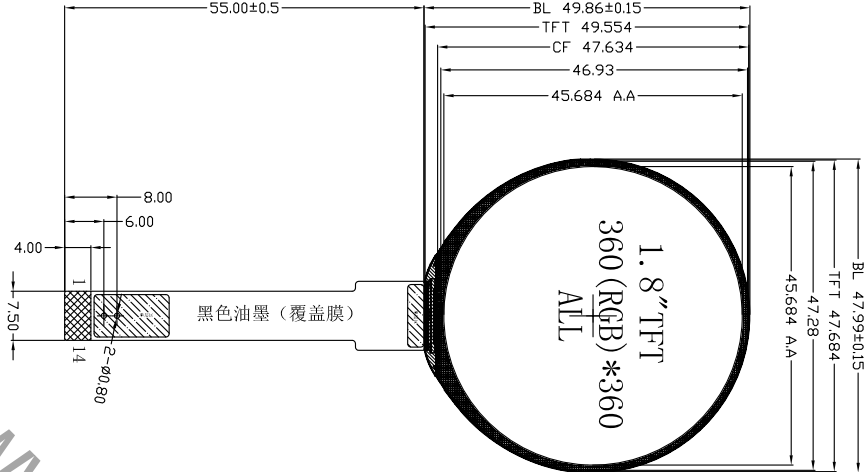


PIN	DESCRIPTION
1	QSPI_CS
2	QSPI_I00
3	QSPI_I01
4	QSPI_I02
5	QSPI_I03
6	QSPI_RST
7	GND
8	QSPI_CLK
9	GND
10	TE
11	VCC
12	GND
13	LEDK
14	LEDA

QSPI

NOTES:

1. DISPLAY TYPE:1.8" TFT, TRANSMISSIVE Normally Black
2. DRIVER IC:ST77916 or compatible
3. VIEWING DIRECTION: All
4. BACKLIGHT: 3 pcs White LED
5. BRIGHTNESS: 350 cd/m² (typ)
6. INPUT VOLTAGE: VCC 2.8V (typ)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. ROHS COMPLIABLY
11. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm



深圳市华之洋光电科技有限公司
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.		Model No.	Drawing Title		HZ0180HVPBWC01N-AA	
Part No.		Approve	Material		Unmarked	Unit
Drawing No.		Checked	LCM		±0.2	mm
Draw		Penglz	Date		2025.07.11	Rev 00

