

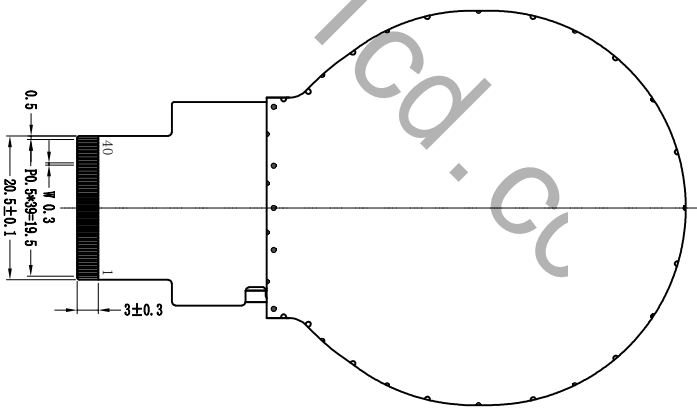


Revision	Description	Date	Signed
A0	首次发行	24.06.12	Pengliz

NO.	SYMBOL	NO.	SYMBOL
1	LEDA	21	B5
2	LEDK	22	G0
3	LEDK	23	G1
4	GND	24	G2
5	VCC	25	G3
6	RESFT	26	G4
7	NC	27	G5
8	NC	28	R0
9	SDA	29	R1
10	SCL	30	R2
11	CS	31	R3
12	PCLK	32	R4
13	DE	33	R5
14	VS	34	GND
15	HS	35	TP-INT
16	B0	36	TP-SDA
17	B1	37	TP-SCL
18	B2	38	TP-RST
19	B3	39	TP-VCC
20	B4	40	GND

NO.	SYMBOL
1	TP-VCC
2	TP-RST
3	TP-VCC
4	TP-SCL
5	TP-SDA
6	TP-INT
6	TP-GND

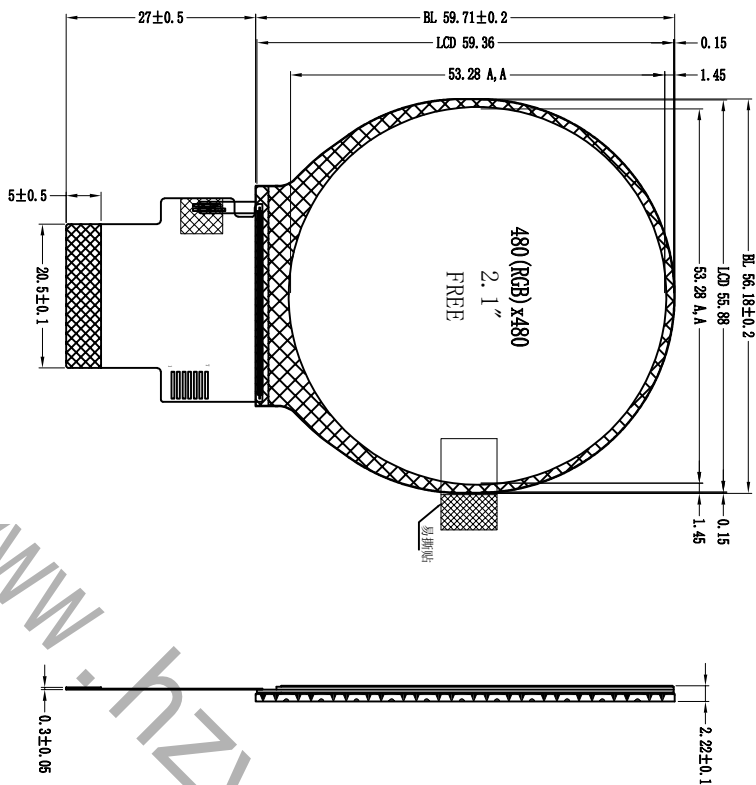

- NOTES:
1. Display: BOE 2.1", ALL 0'clock;
  2. Driver IC: ST7701S;
  3. STORAGE TEMPERATURE: -30° C TO 80° C;
  4. OPERATING TEMPERATURE: -20° C TO 70° C;
  5. BL LED: 2 CHIP-WHITE LEDS , IF=80mA;
  6. LCM Brightness: 250cd/m<sup>2</sup>(MIN), 300cd/m<sup>2</sup>(typ);
  7. CONNECTOR TYPE : 插接;
  8. \* CRITICAL DIMENSION; 0 REFERENCE DIMENSION;
  9. RECOMMENDED CELLPHONE WINDOW SIZE: 0.5mm FROM LCD A.A AREA ;
  10. LCD warp is ≤ 0.3;
  11. 偏光片上细砂下光片;
  12. 符合一级环境禁用管理物质。



深圳市华之洋光电科技有限公司  
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	---	HZ021YPBS01-A0	±0.2	mm	--	1 of 1
Part No.	Approve	Material	Material	Unit	Scale	Page
---	---	LCM	---	---	---	---
Drawing No.	Checked	Date	Rev	00	---	---
---	---	2024.06.12	Rev	00	---	---
---	Draw	Pengliz	---	---	---	---