



ROSH

Revision	Description	Date	Signed
A0	First	23.11.28	Allen

正视图

侧视图

背视图

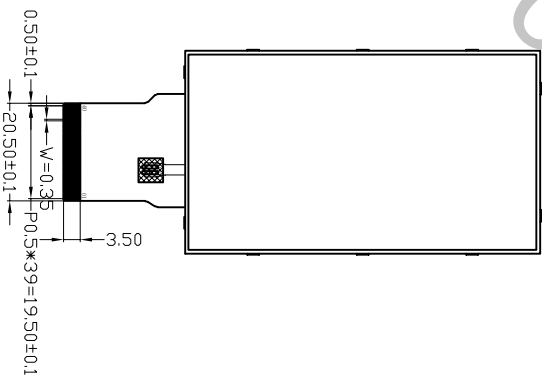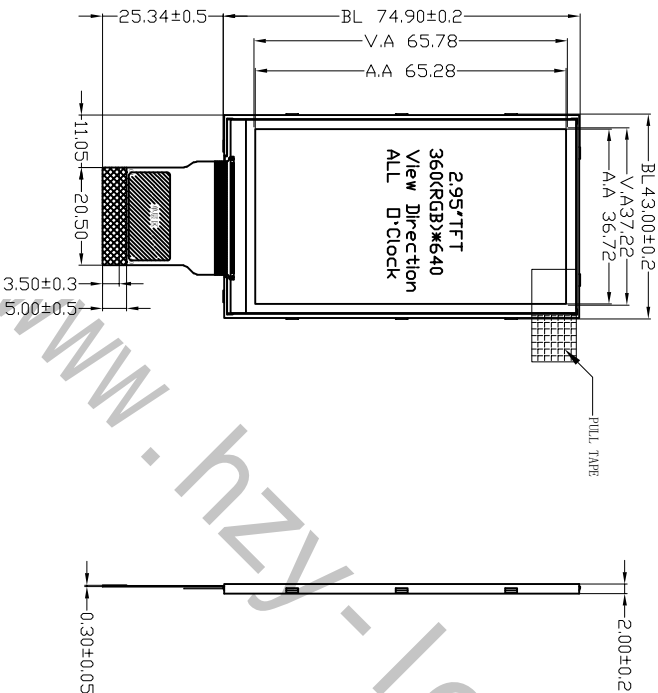

1	LEDA
2	LEDK
3	VCC2.8V/3.3V
4	GND
5	GND
6	GND
7	GND
8	GND
9	GND
10	GND
11	GND
12	GND
13	GND
14	VSYNCG
15	HSYNG
16	PCLK
17	DEN
18	B0
19	B1
20	B2
21	B3
22	B4
23	G0
24	G1
25	G2
26	G3
27	G4
28	G5
29	R0
30	R1
31	R2
32	R3
33	R4
34	RESET
35	CS
36	SCL
37	SDA
38	GND
39	VDD2.8V/3.3V
40	GND

If=20mA, Vf=19.2V (TYP)

BACKLIGHT CIRCUIT

展开出货



NOTES:

1. DISPLAY TYPE: 2.95" TFT, TRANSMISSIVE
2. DRIVER IC: ST7701S
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 6 pcs White LED
5. INPUT CURRENT: VCC 2.8V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
9. ROHS COMPLIABLY



深圳市华之洋光电科技有限公司  
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title	Material	Unmarked Tolerance	Unit	Scale	Page
---	Approve	LCM	±0.2	mm	--	1 of 1	
Part No.	Checked	Date	2023.11.21	Rev 00			
Drawing No.	Draw	Allen					

Customer Ref. HZ030WPHS01-A0

A

B

C

D

8 7 6 5 4 3 2 1