



ROSH

Revision	Dispcription	Date	Signed
01	First	2022.06.28	YP

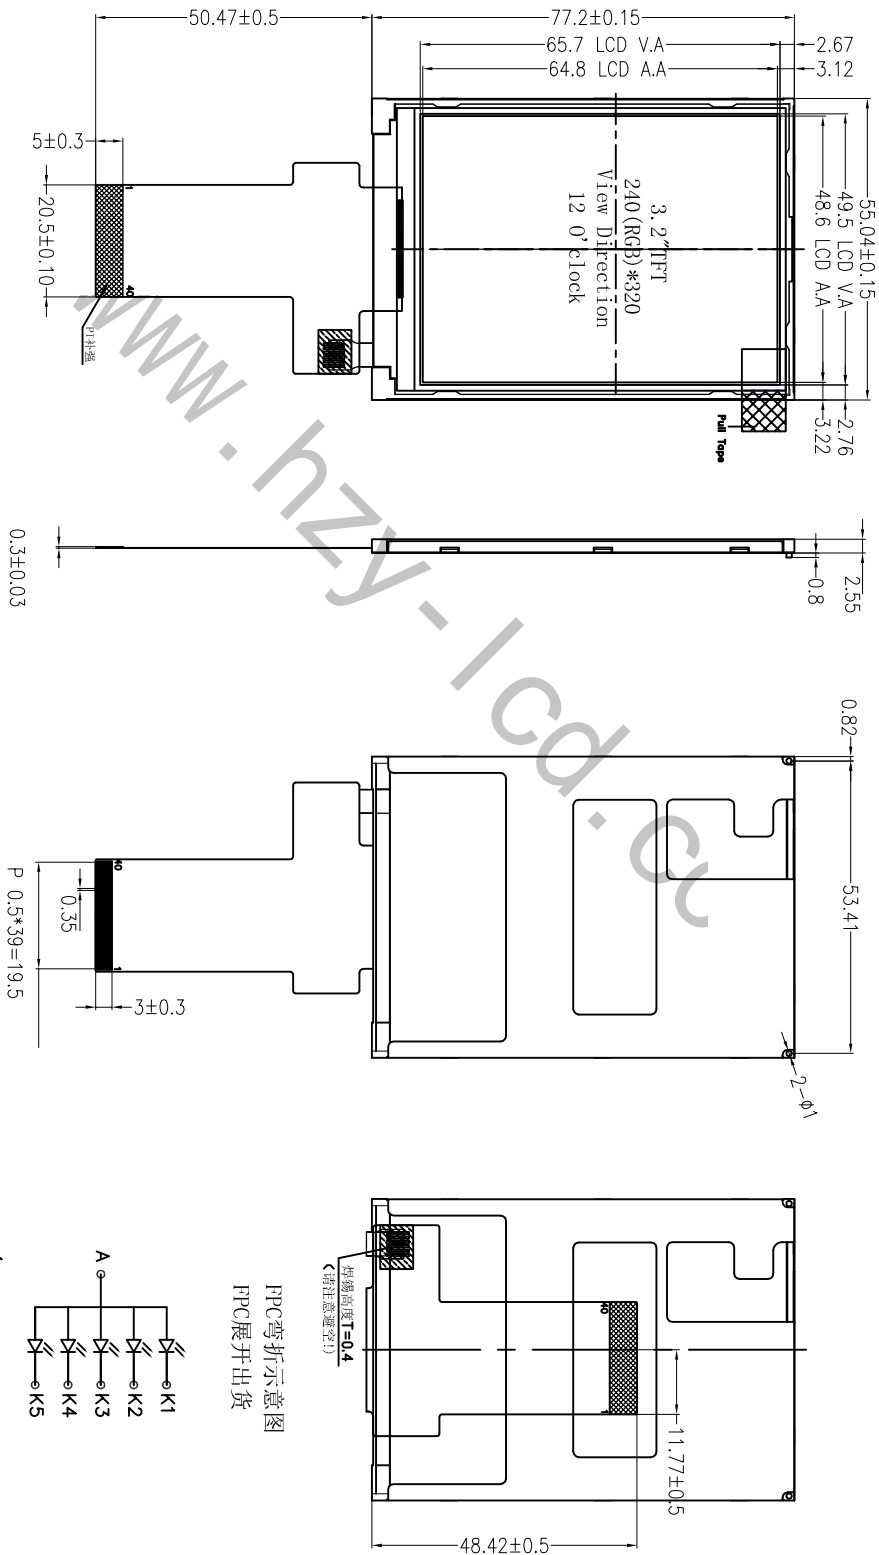

B/L CIRCUIT DIAGRAM  
LED:IF = 100mA,VF=3.2V



FPC INTERFACE

1	GND
2	VOI2.8
3	IOVCC
4	CS
5	RS
6	WR
7	RD
8	RESET
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15
25	GND
26	NC
27	NC
28	NC
29	NC
30	LEDK1
31	LEDK2
32	LEDK3
33	LEDK4
34	LEDK5
35	LEDA
36	LEDA
37	GND
38	NC
39	NC
40	NC

- NOTES:
1. DISPLAY TYPE:3.2" TFT, TRANSMISSIVE
  2. DRIVER IC:ST7789V2
  3. VIEWING DIRECTION: 12 0° CLOCK
  4. BACKLIGHT: 5 pcs White LED
  5. INPUT CURRENT: VCC 2.8V (type)
  6. OPERATING TEMP: -20° C ~ +70° C
  7. STORAGE TEMP: -30° C ~ +80° C
  8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
  9. ROHS COMPLIABLY

深圳市华之洋光电科技有限公司  
Shenzhen HZY Photoelectric Technology Co.,Ltd

Customer Ref.	Model No.	Drawing Title	HZ032QTHS01-A0
Part No.	Approve	Material	Unmarked
Drawing No.	Checked	LCM	±0.2
Draw	YP	Date	2022.06.28
		Rev	00
		Page	1 of 1