
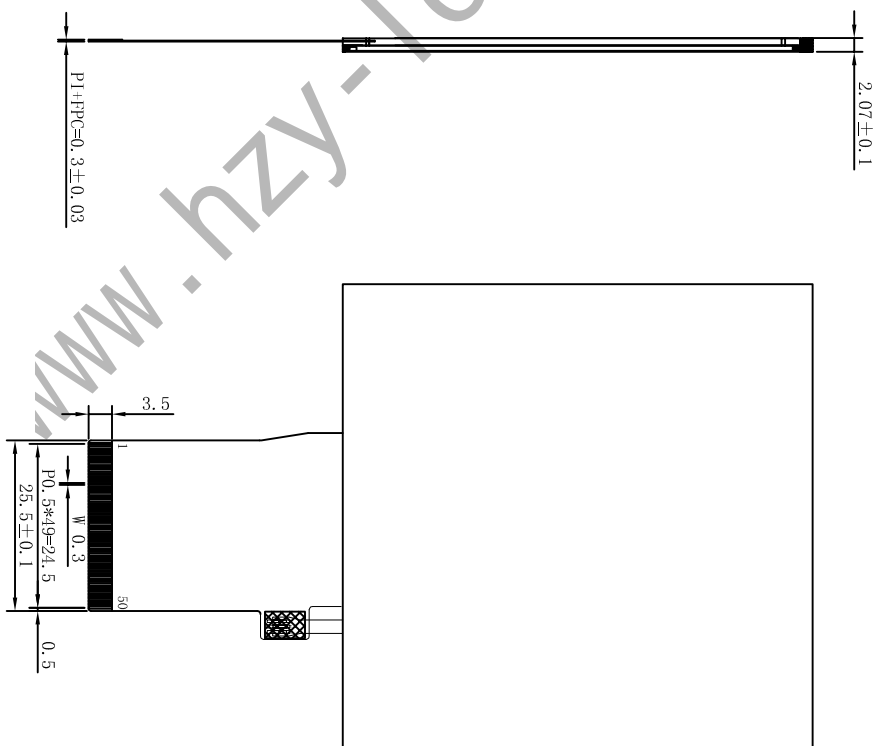



ROSH

Revision	Discription	Date	Signed
01	First	2022.07.18	YP

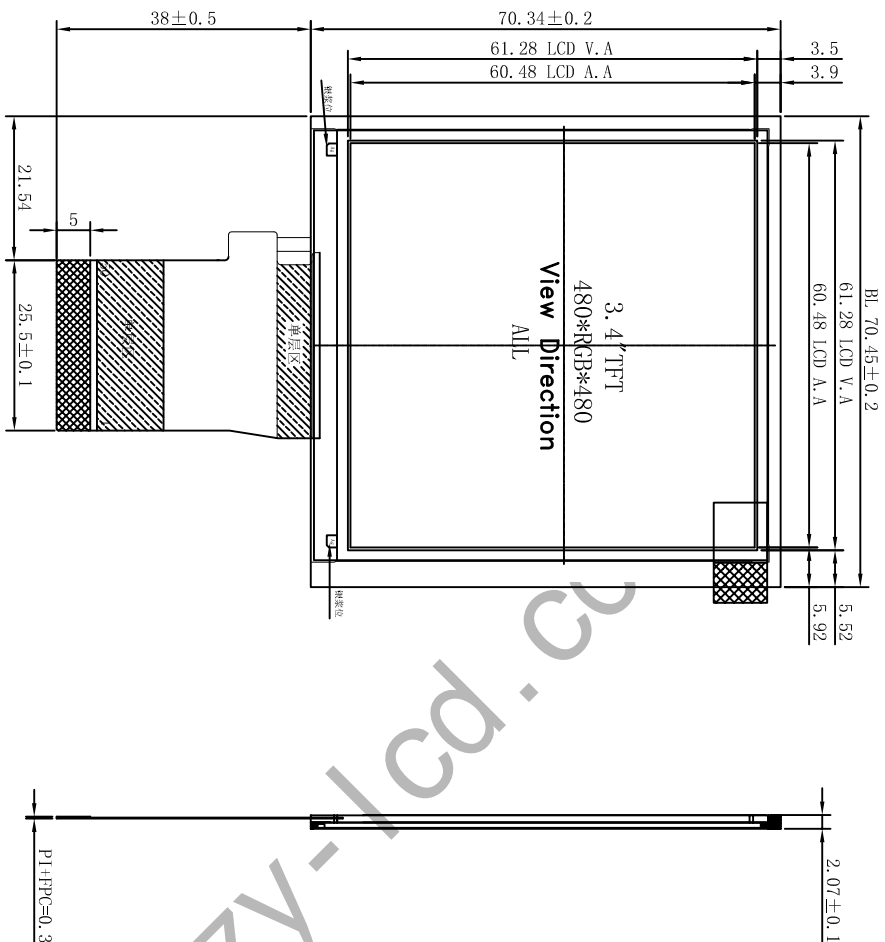

NO.	SYMBOL
1	LED-A
2	LED-K
3	GND
4	SDA
5	NC
6	SCL
7	TE
8	CS
9	RST/RT
10	D23
11	D22
12	D21
13	D20
14	D19
15	D18
16	D17
17	D16
18	D15
19	D14
20	D13
21	D12
22	D11
23	D10
24	D9
25	D8
26	D7
27	D6
28	D5
29	D4
30	D3
31	D2
32	D1
33	D0
34	DE
35	PCLK
36	HS
37	VS
38	PWM
39	GND
40	DIP
41	D1N
42	GND
43	CLKP
44	CLKN
45	GND
46	DDP
47	DDN
48	GND
49	VCT
50	VDD1

- NOTES:
1. DISPLAY TYPE: 3.4" TFT, TRANSMISSIVE
 2. DRIVER IC: ST7701S
 3. VIEWING DIRECTION: ALL
 4. BACKLIGHT: 8 pcs White LED
 5. INPUT CURRENT: VCC 2.8V (type)
 6. OPERATING TEMP: -20 °C ~ +70 °C
 7. STORAGE TEMP: -30 °C ~ +80 °C
 8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
 9. ROHS COMPLIABLY

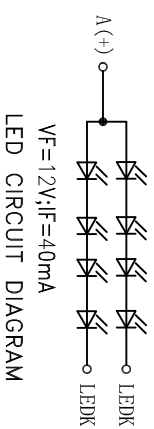

深圳市华之洋光电科技有限公司

Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	Approve	HZ034KPPBS01-A0	±0.2	mm	--	1 of 1
Part No.	Checked	Material	LCM			
Drawing No.	Draw	YP	Date	2022.07.18	Rev 00	