
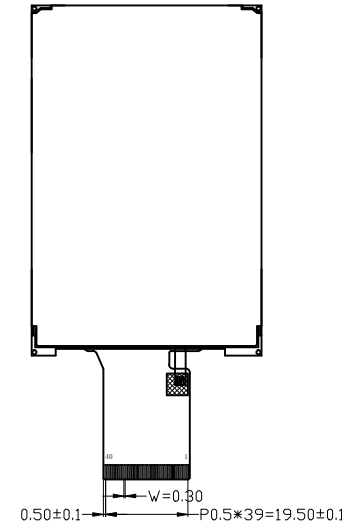
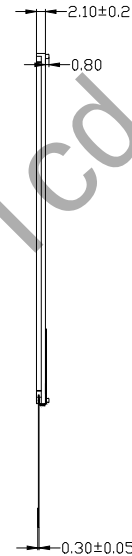


ROSH

Reversion	Discription	Date	Signed
A0	First	23.11.21	Allen
B0	背光灯改为5串2并，增加亮度	24.05.20	Allen

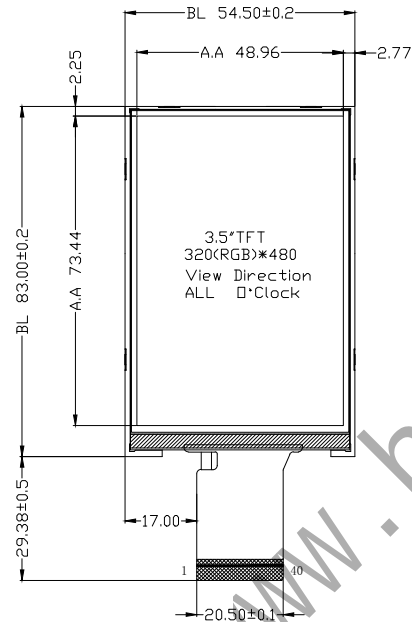

1	LEDA
2	LEDK
3	VCC2.8V/3.3V
4	GND
5	GND
6	GND
7	GND
8	GND
9	GND
10	GND
11	GND
12	GND
13	GND
14	VSYNC
15	HSYNC
16	PCLK
17	DEN
18	B0
19	B1
20	B2
21	B3
22	B4
23	G0
24	G1
25	G2
26	G3
27	G4
28	G5
29	R0
30	R1
31	R2
32	R3
33	R4
34	RESET
35	CS
36	SCL
37	SDA
38	GND
39	VDD2.8V/3.3V
40	GND

展开出货

NOTES:

- DISPLAY TYPE: 3.5" TFT, TRANSMISSIVE
- DRIVER IC: ST7365P or COMPATIBLE
- VIEWING DIRECTION: ALL
- BACKLIGHT: 10 pcs White LED
- INPUT CURRENT: VCC 2.8V(TYP)
- OPERATING TEMP: -20° C ~ +70° C
- STORAGE TEMP: -30° C ~ +80° C
- UNDEFINED DIMENSION TOLERANCE: $\pm 0.3\text{mm}$
- RoHS COMPLIABLE



If=40mA, Vf=15.0V (TYP)
BACKLIGHT CIRCUIT

		深圳市华之洋光电科技有限公司						
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD								
Customer Ref.	Model No.		Drawing Title	HZ035HPBS14-B0				
	Approve		Material	Unmarked Tolerance	Unit	Scale	Page	
Part No.	Checked		LCM	± 0.2	mm	--	1 of 1	
Drawing No.	Draw	Allen	Date	2024.05.20	Rev 00			