

ROSH




Revision	Description	Date	Signed
01	First	2022.03.15	YP

MIPi interface

PIN: SYMBOL
1 NC
2 NC
3 NC
4 NC
5 VCI3.3V
6 RESET
7 VCI3.3V
8 GND
9 GND
10 CLKP
11 GND
12 CLKN
13 GND
14 GND
15 GND
16 DOP
17 GND
18 DON
19 NC
20 GND
21 NC
22 LEDA
23 NC
24 LEDK
25 NC
26 NC
27 IOVCC1
28 GND
29 IOVCC1
30 GND

BACKLIGHT CIRCUIT

If=20mA, Vf=18V-19.2V

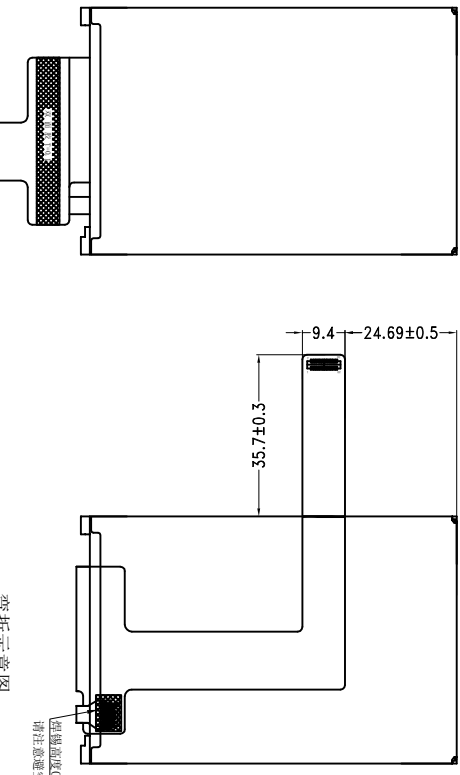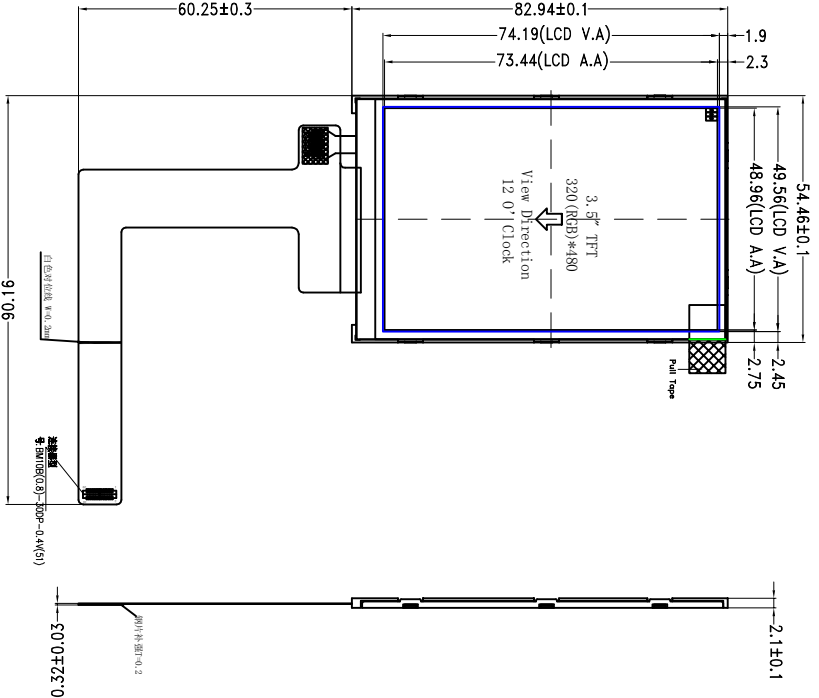

弯折示意图
弯折出货

NOTES:

1. DISPLAY TYPE: 3.5" TFT, TRANSMISSIVE
2. DRIVER IC:ST7796U
3. VIEWING DIRECTION: 12° Clock
4. BACKLIGHT: 6 pcs White LED
5. INPUT CURRENT: VCC 2.8V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLY

深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	HZ035HTCCS01-A0	
Part No.	Approve	Material	Unmarked	Unit
Drawing No.	Checked	LCM	±0.2	mm
	Draw	Date	2022.03.15	Rev 00