


LED CIRCUIT DIAGRAM

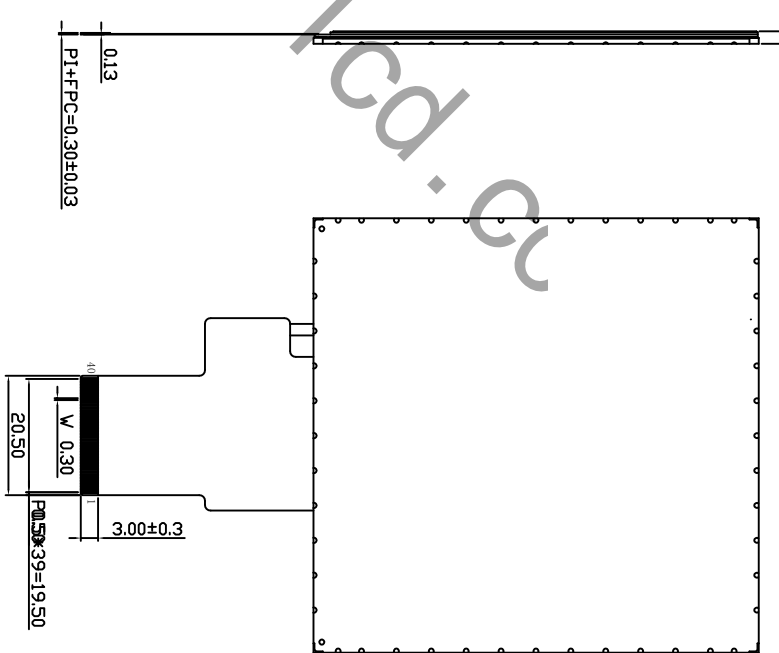

NO.	SYMBOL
1	LEDA
2	LEDK1
3	LEDK2
4	GND
5	VCI
6	RESFT
7	NC
8	NC
9	SDA
10	SCK
11	CS
12	PCLK
13	DE
14	VSYNC
15	HSYNC
16-33	DB0-DB17
34	GND
35	TP_VCC
36	TP_RST
37	TP_INT
38	TP_SCL
39	TP_SDA
40	GND

TP	
1	GND
2	TP_SDA
3	TP_SCL
4	TP_INT
5	TP_RST
6	TP_VCC

ES:
 DISPLAY TYPE:3.95" TFT , TRANSMISSIVE
 DRIVER IC:ST7701S
 VIEWING DIRECTION: ALL 0°CLOCK
 BACKLIGHT: 8 pcs White LED LCM Brightness:250cd/m²
 INPUT CURRENT: VCC 2.8V(type)
 OPERATING TEMP: -20° C~+70° C
 STORAGE TEMP: -30° C~+80° C
 UNDEFINED DIMENSION TOLERANCE: ±0.2mm
 ROHS COMPLIABLY

深圳市华之洋光电科技有限公司
 Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref	Model No	Drawing Title	Material	Unmarked Tolerance	Unit	Scale	Page
---	---	HZ040YPHS01-A0	LCM	±0.2	mm	---	1 of 1
Part No.	Approve	Checked	Draw	Date	Rev	00	
---	---	---	WBr1	2024/01/27	00		
Drawing No.	Draw	Br1	Date	Rev	00		
---	---	---	---	---	---	---	---

8 7 6 5 4 3 2 1