

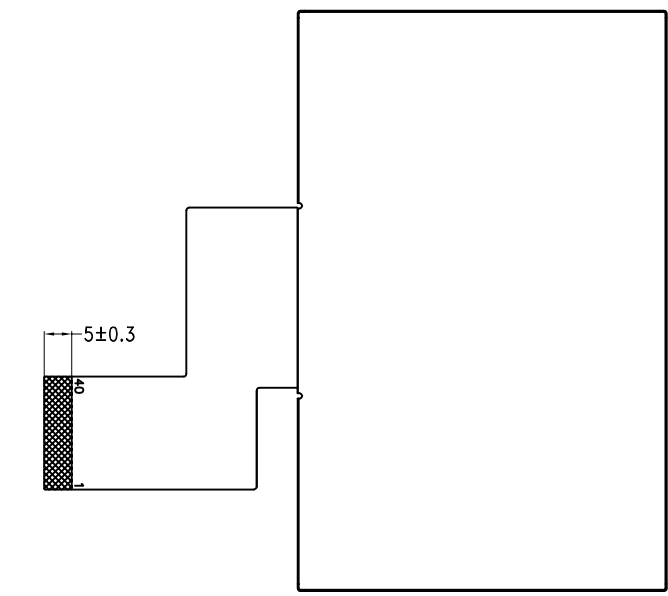
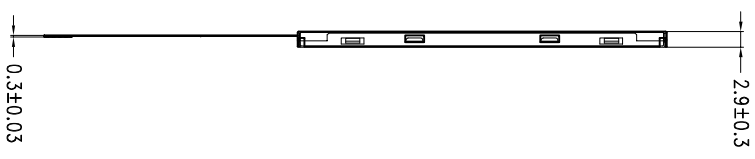


Revision	Dispersion	Date	Signed
01	First	2022.08.26	YP

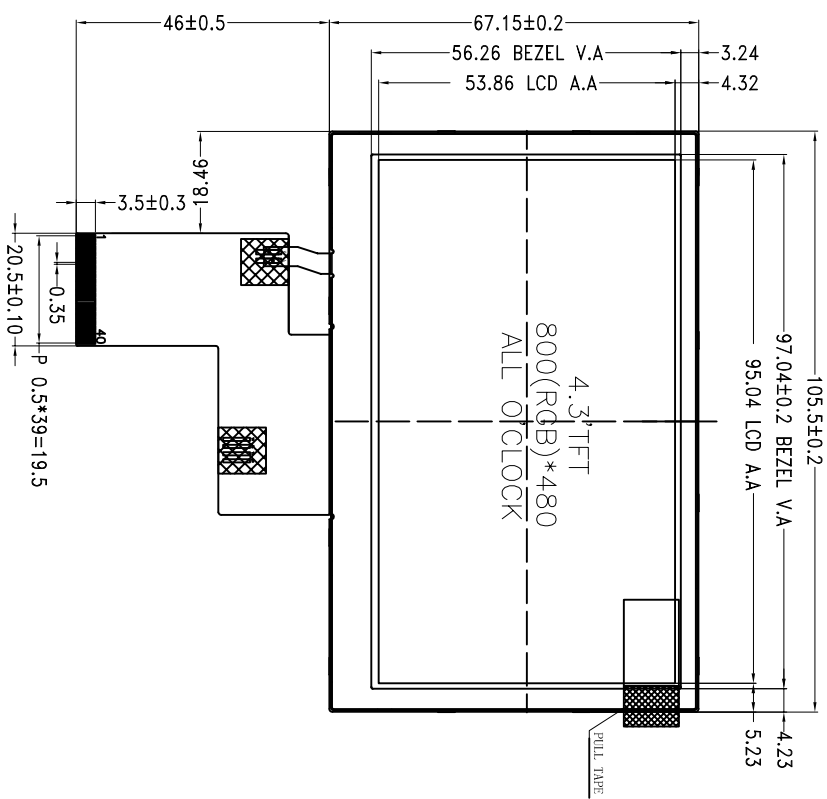

VF=25.6±0.3V;IF=40mA

LED CIRCUIT DIAGRAM

FPC INTERFACE

1	WLED-
2	WLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSTYNG
33	VSTYNG
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

NOTES:

1. DISPLAY TYPE: 4.3" TFT, TRANSMISSIVE
2. DRIVER IC:ST7262
3. VIEWING DIRECTION: ALL 0'CLOCK
4. BACKLIGHT: 16 pcs White LED
5. INPUT CURRENT: VCC 3.3V(type)
6. OPERATING TEMP: -20°C~+70°C
7. STORAGE TEMP: -30°C~+80°C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLY

深圳市华之洋光电科技有限公司  
Shenzhen HZY Photoelectric Technology Co.,Ltd

Customer Ref.	Model No.	Drawing Title	Material	Unmarked Tolerance	Unit	Scale	Page
---	Approve	LCM	±0.2	mm	---	1 of 1	
Part No.	Checked	Date	2021.08.26	Rev 00			
Drawing No.	Draw	YP					

A

B

C

D

8

7

6

5

4

3

2

1