
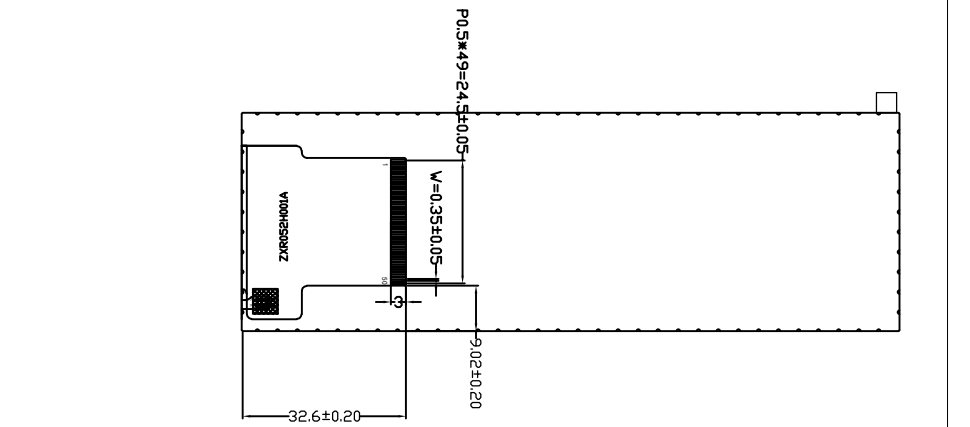
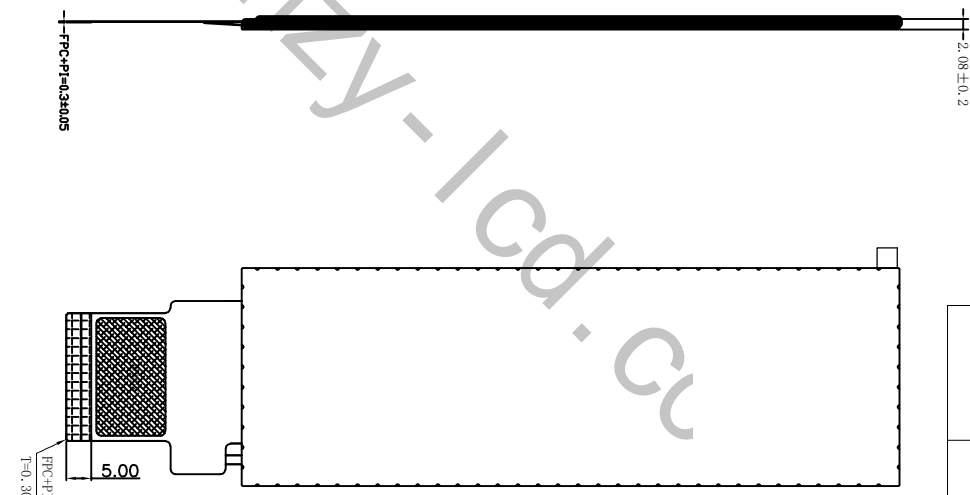



Revision	Discription	Date	Signed
A0	First	24.01.15	Allen

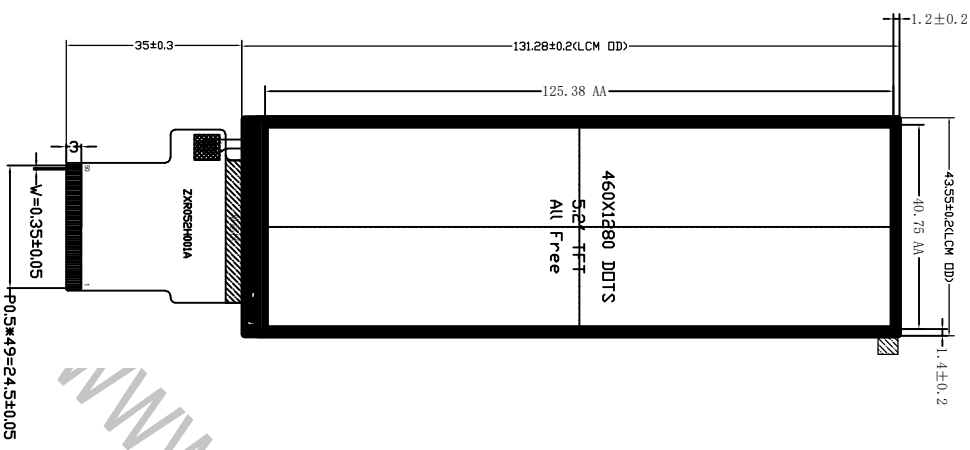

PIN	DESCRIPTION
1	LED K
2	LED A
3	GND
4	HP1_D0N
5	HP1_D0P
6	GND
7	HP1_G1AN
8	HP1_G1AP
9	GND
10	HP1_D1N
11	HP1_D1P
12	GND
13	VSYNC
14	Hsync
15	DCX
16	DE
17-24	B0-B7
25-32	G0-G7
33-40	R0-R7
41	RESX
42	CSX
43	SCX
44	SDX
45	S0D
46	DCX
47	NC
48	TR8
49	TVCC
50	VDD

NOTES:

1. DISPLAY TYPE:5.2" TFT, TRANSMISSIVE
2. DRIVER IC:JD9161S
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 10 pcs White LED
5. BRIGHTNESS: TBD
6. INPUT CURRENT: VCC 2.8V (type)
7. OPERATING TEMP: -10° C ~ +60° C
8. STORAGE TEMP: -20° C ~ +70° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY

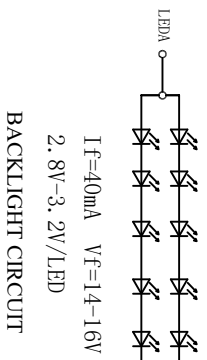

BACKLIGHT CIRCUIT

FPC弯折示意图
FPC弯折出货图



深圳市华之洋光电科技有限公司
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	Approve	HZ052MPBS01-A0	±0.3	mm	--	1 of 1
Part No.	Checked	Material	LCM	mm	--	1 of 1
Drawing No.	Draw	Date	2024.01.15	Rev	00	
---	Allen					