


ROSH


Revision	Dispersion	Date	Signed
01	First	2022.05.18	YP

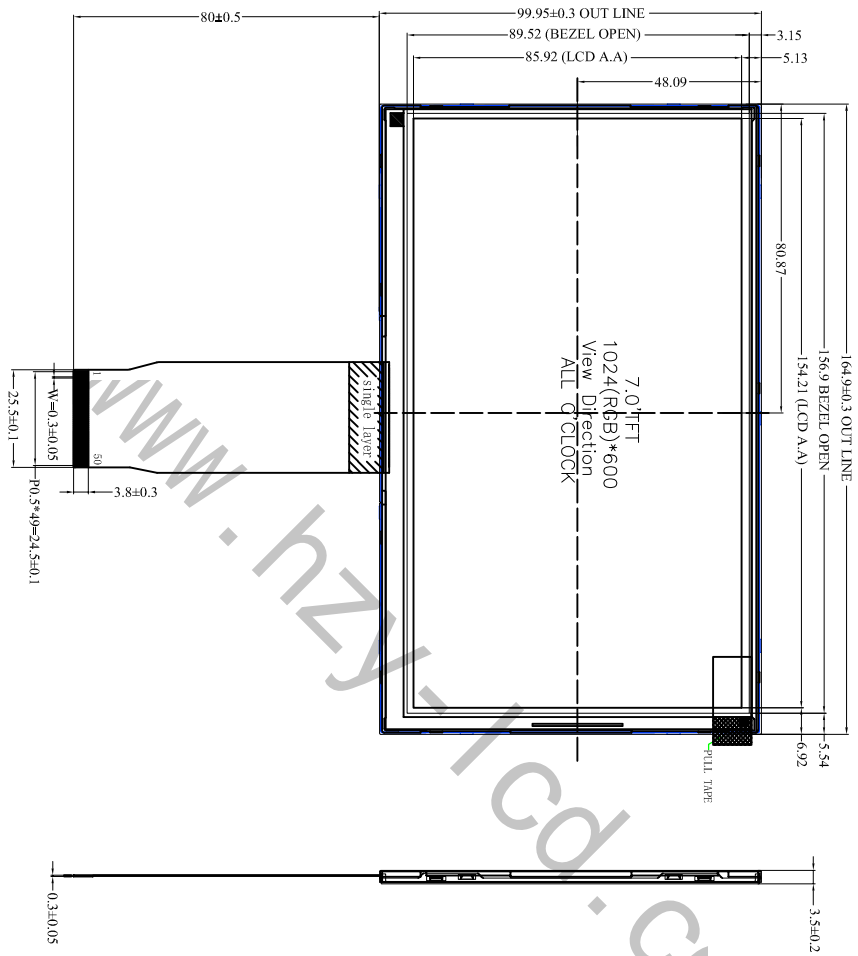

PIN	SYMBOL
1	LED+
2	LED+
3	LED-
4	LED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VSYNC
11	HSYNC
12~19	B7 ~ B0
20~27	G7 ~ G0
28~35	R7 ~ R0
36	GND
37	DCLK
38	GND
39	L/R
40	L/D
41	VGH
42	VGL
43	AVDD
44	RSTB
45	NC
46	VCOM
47	D1THB
48	GND
49	NC
50	NC

NOTES:

1. DISPLAY TYPE: 7.0" TFT, TRANSMISSIVE
2. DRIVER IC: EK79001HN + EK73215BCGA
3. VIEWING DIRECTION: ALL 0° CLOCK
4. BACKLIGHT: 27 pcs White LED
5. INPUT CURRENT: VCC 3.3V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLY

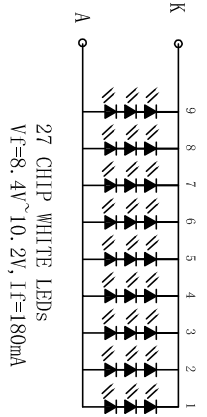

深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	Approve	HZ070XPBT01-A0	±0.2	mm	--	1 of 1
Part No.	Checked	Material	LCM	Date	2022.05.18	Rev 00
---	Draw	YP				
Drawing No.	Draw	YP				