



ROSH

Revision	Description	Date	Signed
01	First	2021.06.15	YP

Pin	Symbol
1	VDD
2	GND
3	NC
4	TE-NC
5	CS
6	RS
7	RD
8	W/R
9	RSTB
10	D0
11	NC
12	D1
13	NC
14	D2
15	NC
16	D3
17	NC
18	D4
19	NC
20	D5
21	NC
22	D6
23	NC
24	D7
25	NC
26	LEDK
27	LEDA

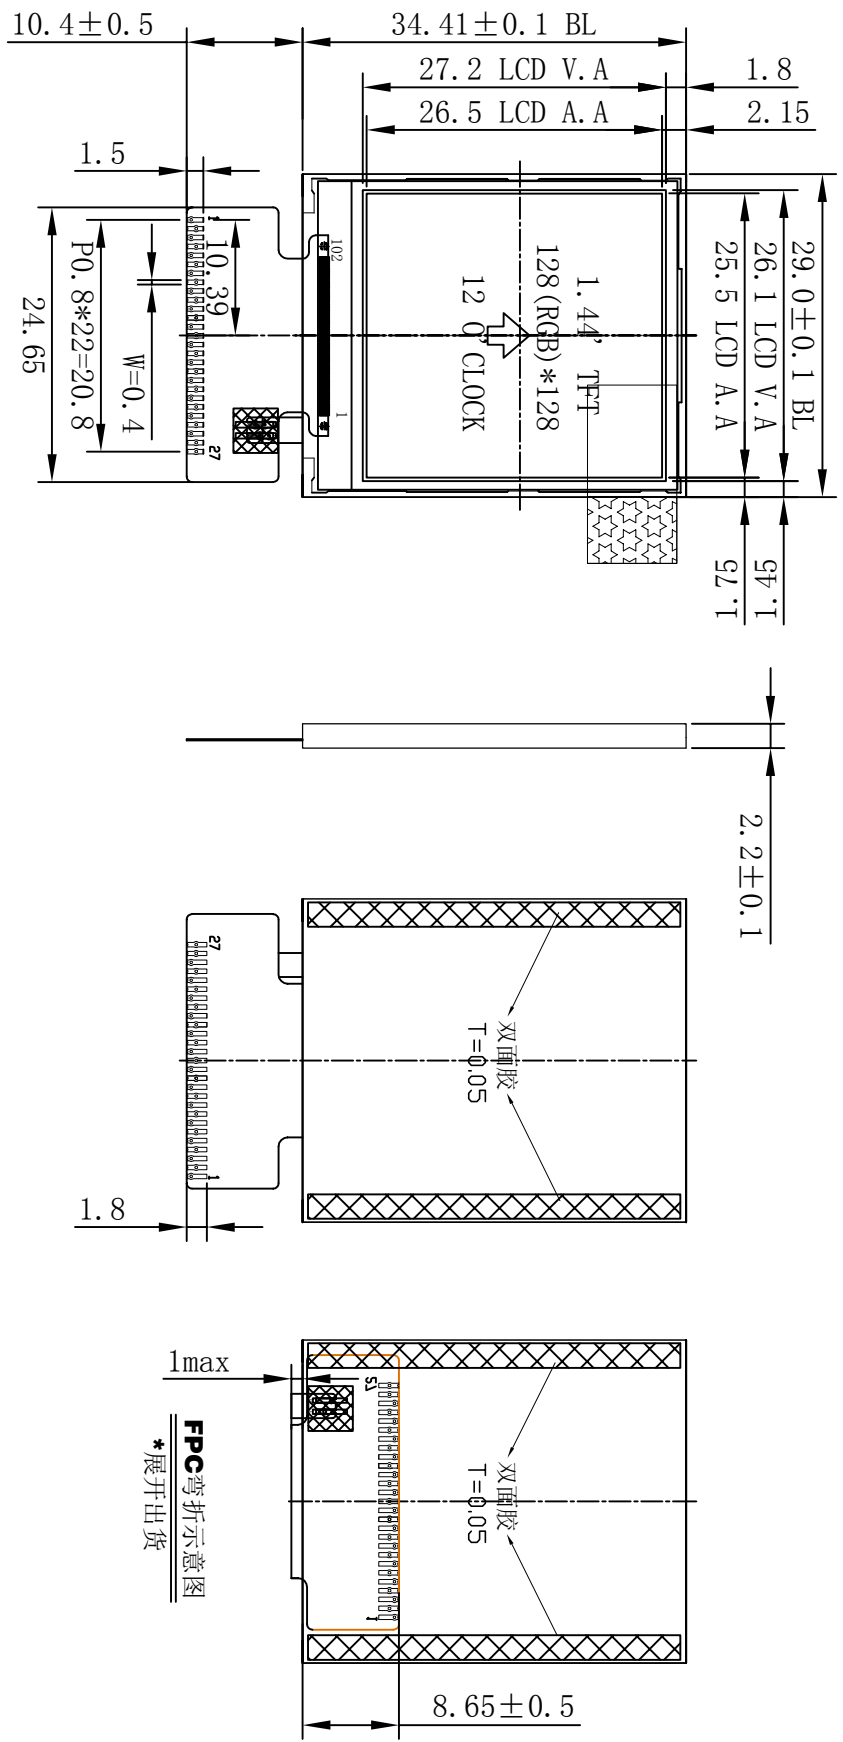

27	LEDA
26	LEDK
25	NC
24	D7
23	NC
22	D6
21	NC
20	D5
19	NC
18	D4
17	NC
16	D3
15	NC
14	D2
13	NC
12	D1
11	NC
10	D0
9	RSTB
8	W/R
7	RD
6	RS
5	CS
4	TE-NC
3	NC
2	GND
1	VDD

- NOTES:
1. DISPLAY TYPE: 1.44" TFT, TRANSMISSIVE
 2. DRIVER IC: ST7735S
 3. VIEWING DIRECTION: 12 O'CLOCK
 4. BACKLIGHT: 2 pcs White LED
 5. INPUT CURRENT: VCC 3.2V (type)
 6. OPERATING TEMP: -20°C ~ +70°C
 7. STORAGE TEMP: -30°C ~ +80°C
 8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
- ROHS COMPLIABLY

深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	HZ144BTCS01-A0
Part No.	Approve	Material Tolerance	Unit
Drawing No.	Checked	LCM ±0.2	mm
	Draw	YP	Date
			2021.06.15 Rev 00