
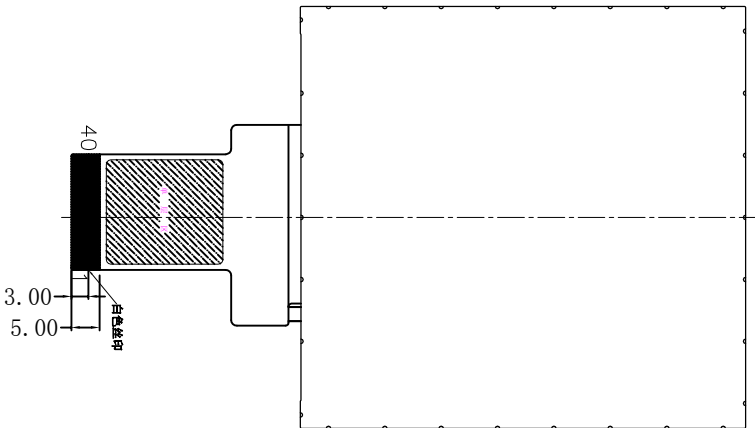


ROSH

Revision	Description	Date	Signed
01	First	2022.03.01	YP

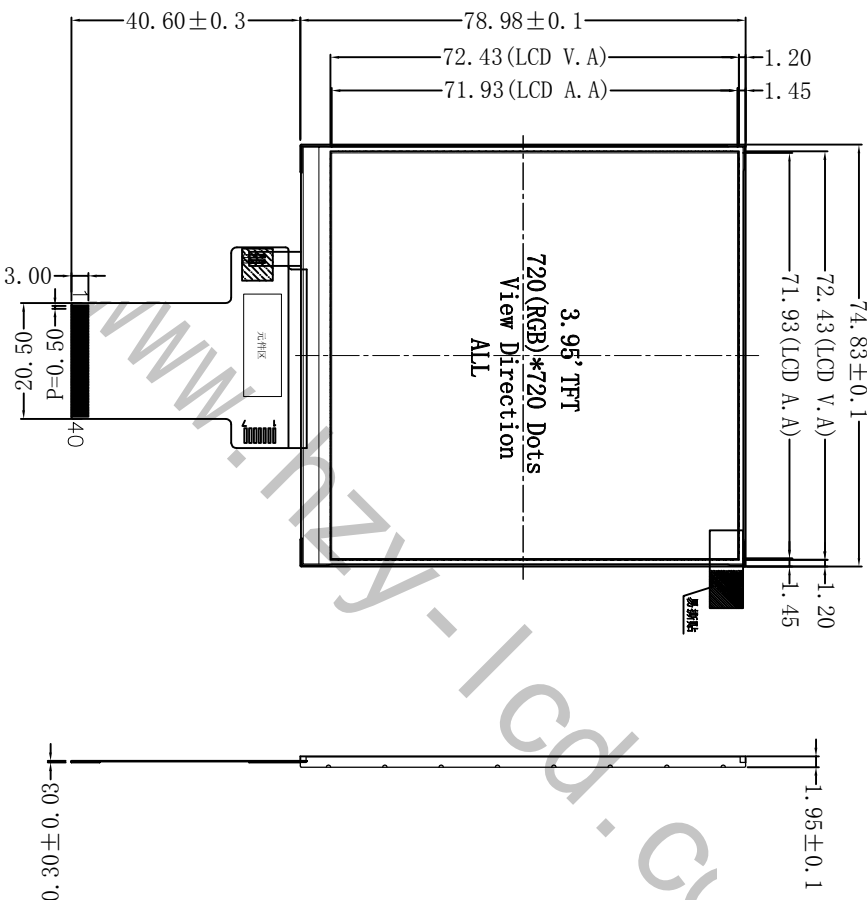


NO.	SYMBOL
1	LEDA
2	LEDK1
3	LEDK2
4	GND
5	VCI
6	RESET
7	NC
8	NC
9	SDA
10	SCK
11	CS
12	PCLK
13	DE
14	VSYN
15	HSYNC
16-33	DB0-DB17
34	GND
35	TP_VCC
36	TP_RST
37	TP_INT
38	TP_SCL
39	TP_SDA
40	GND

CTP

1	GND
2	TP_SDA
3	TP_SCL
4	TP_INT
5	TP_RST
6	TP_VCC

NOTES:

1. DISPLAY TYPE: 3.95" TFT , TRANSMISSIVE
2. DRIVER IC: NV3052CGRB
3. VIEWING DIRECTION: ALL 0' CLOCK
4. BACKLIGHT: 8 pcs White LED
5. INPUT CURRENT: VCC 2.8V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLY

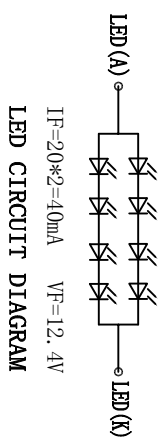

深圳市华之洋光电科技有限公司

Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title				
---		HZ3951PBX02-A0				
Part No.	Approve	Material	Unmarked Tolerance	Unit	Scale	Page
---	Checked	LCM	±0.2	mm	--	1 of 1
Drawing No.	Draw	Date	Rev	00		
---	YP	2022.03.01	Rev	00		

8 7 6 5 4 3 2 1