



Revision	Dispersion	Date	Signed
01	First	2022.11.18	YP

FPC INTERFACE

1	WLED-
2	WLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSTVNC
33	VSTVNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

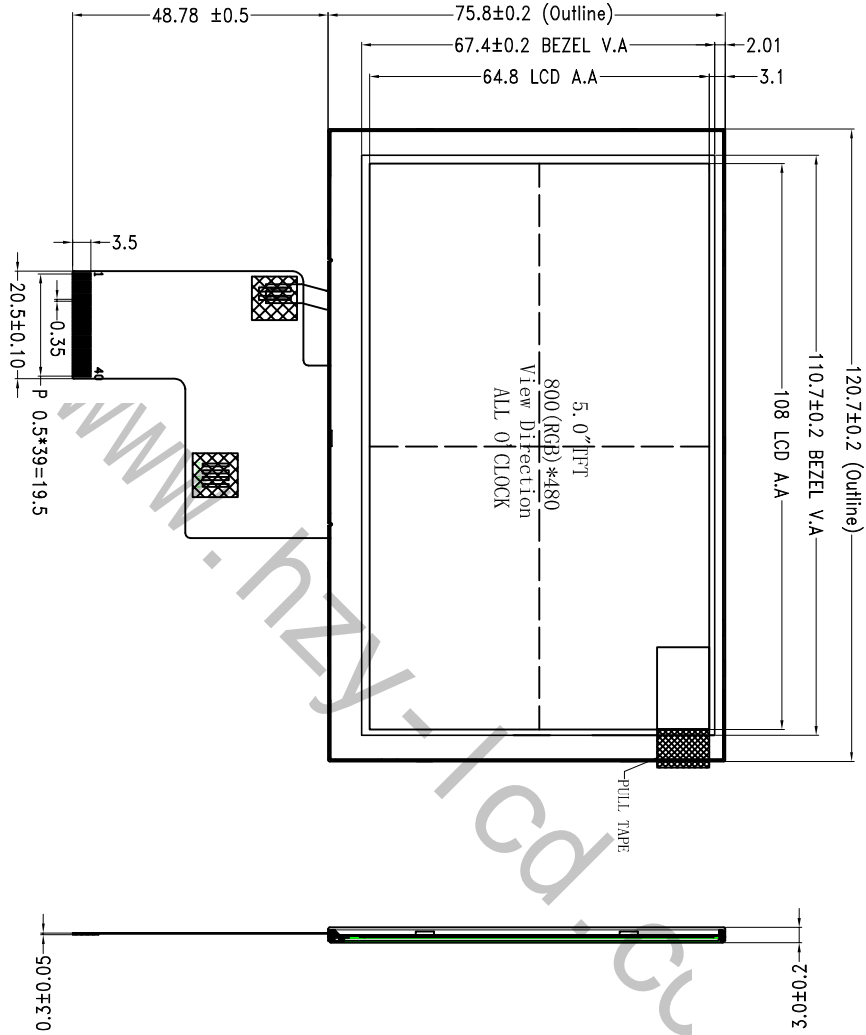

- NOTES:
1. DISPLAY TYPE: 5.0" TFT, TRANSMISSIVE
  2. DRIVER IC: ST7262
  3. VIEWING DIRECTION: ALL 0' CLOCK
  4. BACKLIGHT: 18 pcs White LED
  5. INPUT CURRENT: VCC 3.3V (type)
  6. OPERATING TEMP: -20° C ~ +70° C
  7. STORAGE TEMP: -30° C ~ +80° C
  8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
  9. ROHS COMPLIABLY

VF=18±0.3V; IF=60mA  
LED CIRCUIT DIAGRAM

深圳市华之洋光电科技有限公司  
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	Approve	LCM	±0.2	mm	--	1 of 1
Part No.	Checked	Date	2022.11.18	Rev 00		
---	Draw	YP				
Drawing No.	Draw	YP				