



ROSH

Reversion	Discription	Date	Signed
A0	First	24.05.13	Allen


正视图

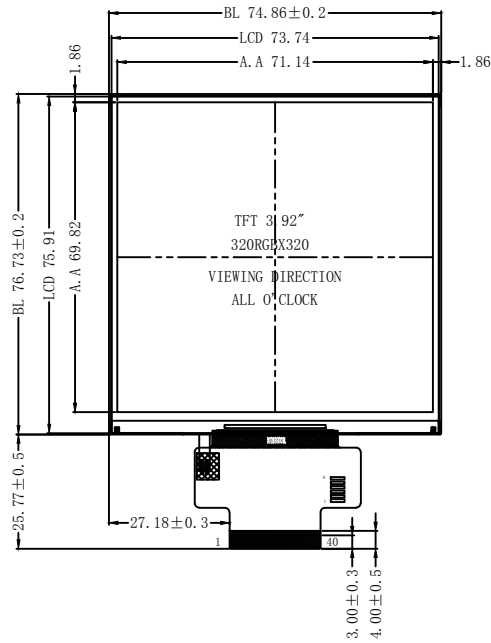

侧视图

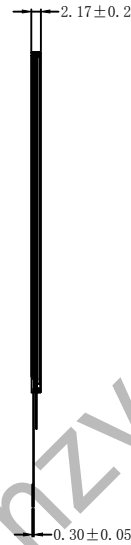

背视图

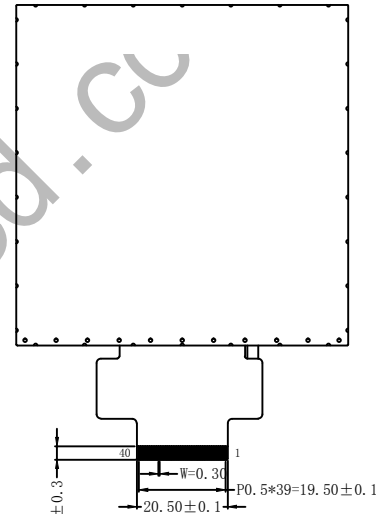


FPC展开出货

NO.	SYMBOL
1	LEDA
2	LEDK
3	GND
4	VCC
5	IOVCC
6	GND
7	RESET
8	CS
9	RS
10	WR
11	RD
12	GND
13	IMO
14	IM1
15	IM2
16	SDO
17	SDA
18	GND
19-34	DB0-DB15
35	GND
36	TP_VDD
37	TP_SDA
38	TP_SCL
39	TP_INT
40	TP_RST

TP	
1	GND
2	TP_VCC
3	TP_RST
4	TP_SCL
5	TP_SDA
6	TP_INT

NOTES:

1. DISPLAY TYPE: 3.92" TFT, TRANSMISSIVE
2. DRIVER IC: ST7365P or COMPATIBLE
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 10 pcs White LED
5. BRIGHTNESS: 400cd/m2 (TYP)
6. INPUT CURRENT: VCC 2.8V (TYP)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY



深圳市华之洋光电科技有限公司
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title		HZ039HPBS01-A0			
---	Approve	Material	Unmarked Tolerance	Unit	Scale	Page	
---	Checked	LCM	±0.3	mm	--	1 of 1	
Drawing No.	Draw	Allen	Date	2024.05.13	Rev 00		